

HUSSMANN®

Specialty



SHVSS

Multi-Deck Self-Service Merchandiser
for Bakery Application

- Refrigerated or Dry

Husmann Multi-Deck Self-Service Merchandiser for Bakery Applications - Refrigerated or Dry

SHVSS



Quality Fit and Finish


This self-service unit can be placed in line with a SHVS service bakery case to give a clean transition between service and self-service.

Merchandising Capacity
This high volume self-service bakery case can hold up to 3 rows of shelves.




Remote Lengths: 48", 57 1/2", 75 1/2", 96", and 144"
Non-Refrigerated Lengths: 48", 57 1/2", 75 1/2", 96", and 144"

SHVSS Self-Service Bakery

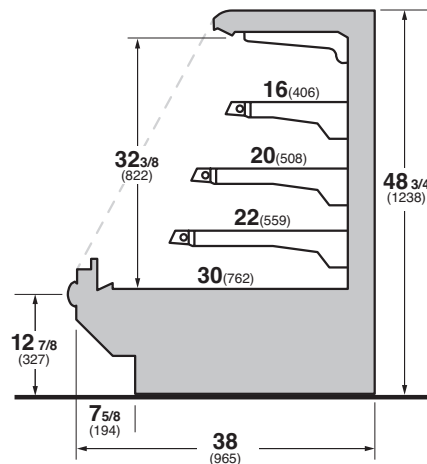

SHVSS Plan View

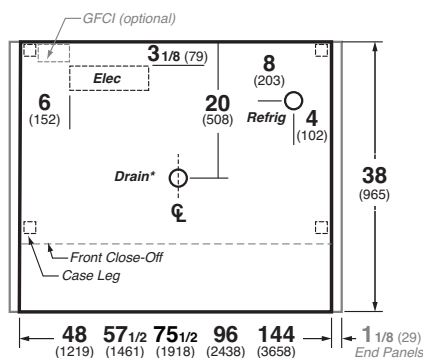

Notes:
*Drain position is for 48" length only, refer to Cadblock drawings for other lengths

Features.

- LED shelf and canopy lighting †
- One 16", one 20", and one 22" metal, LED lighted shelf
- Black interior
- Impact bumper
- Standard Husmann colors
- Please reference color chart for choice of standard Husmann paint and finish options (www.husmann.com)

Options.

- End panels (solid or view end)
- White interior
- Glass or wire shelves
- Stainless steel interior
- Custom lengths and options* (consult your Husmann sales representative)
- Special interior and exterior finishes* (consult your Husmann sales representative)

Additional Information.

- Multi-Deck Self-Service Bakery Case: SHVS
- Self-Service Low Temp Case: SFG/SGNG



Husmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

* Some optional features may need to be certified by UL, NSF, and/or other 3rd party certification agencies. Contact Husmann for verification or questions for availability.

† Only lighting configurations that are compliant with the U.S. Dept. of Energy (DOE) 2017 regulation are available for sale for use in the U.S.A.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H. We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources, contact your representative or visit www.husmann.com.



Note.

Use Husmann's technical data sheets to get precise dimensions for all store layout purposes.

Intertek Intertek

HUSMANN®


Husmann Specialty
13770 Ramona Avenue
Chino, California 91710-5423
Ph: 800.395.9229

www.husmann.com






SERVICE CAKE
HUSSMANN - SHVSS (CHINO)

REVISION DATE 04/28/17



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

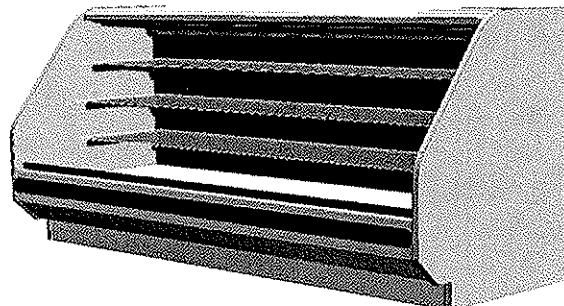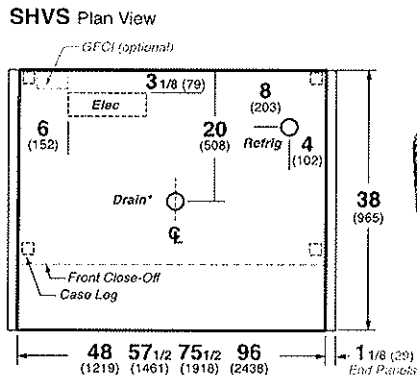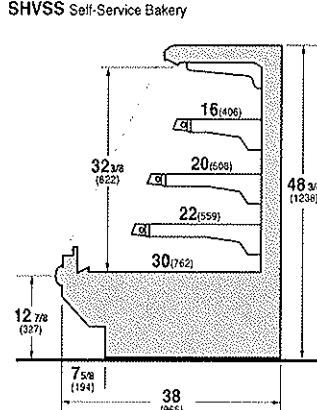

Notes:
*Drain position is for 48" length only, refer to Cadblock drawings for other lengths

REFRIGERATION DATA:

CASE LENGTHS (IN)	CASE USAGE	CAPACITY *** (BTU/HR/FT)		TEMPERATURE (°F)			VELOCITY (FT/MIN)
		RATING CONDITION		EVAPORATOR		DISCHARGE AIR ** (°F)	
		NSF 7	AHRI 1200	NSF 7	AHRI 1200	NSF 7	
48, 57.5, 75.5, 96, 144	BAKERY	725	725	24	24	30~32	300~350

CASE LENGTHS	EST. REFG. CHR.G. 404A (LBS)	20°F GLYCOL 6° RISE	
		GPM	PSI
48"	0.50	0.80	1.9
57.5"	0.70	1.06	2.7
75.5"	9.00	1.31	4.4
96"	1.10	1.55	6.2

**FRONT DISCHARGE AIR MEASURED INSIDE AIR CURTAIN HONEYCOMB

***REFRIGERATION NOTES:

- 1) BTU'S INCLUDE CANOPY LIGHTS. ADD 10 BTU/SHELF/FT FOR EACH SHELF (LIGHT)
- 2) AHRI 1200 RATING POINT FOR ENERGY CONSUMPTION COMPARISON ONLY
- 3) USE DEW POINT FOR HIGH GLIDE REFRIGERANTS. CARE SHOULD BE TAKEN TO USE THE DEW POINT IN P/T TABLES FOR MEASURING AND ADJUSTING SUPERHEAT. ADJUST EVAPORATOR PRESSURE AS NEEDED TO MAINTAIN THE DISCHARGE AIR TEMPERATURE SHOWN.
- 4) RATING CONDITION IS NSF TYPE I, 75°F/55% RH

REFRIGERATION DATA CONTINUED:

ELEC. THERMOSTAT / AIR SENSOR SETTINGS			DEFROST TYPE	TIME (MIN)	DEFROST FREQUENCY (#/DAY)	TERM. TEMP (°F) COIL ONLY	DRIP TIME	DEFROST WATER (LBS/DAY/FT)
USAGE	CUT IN (°F)	CUT OUT (°F)						
BAKERY	32	28	OFF TIME	30	6	48	N/A	4.2

END PANEL WIDTH KEY		
# OF END PNLS	END PNL WIDTH (IN.)	TOTAL ADDED LENGTH (IN.)
1	1.125	1.125
2	1.125	2.25

ELECTRICAL DATA:

STANDARD FANS, LED LIGHTS (115 VOLT)

CASE LENGTH	EVAPORATOR FANS					AIRSWEEP FANS			CANOPY LIGHTS LED		OPTIONAL LED SHELF LIGHTS		MAX. LED LOAD (W/ ALL OPTIONS)	
	# OF EVAP FANS	BLADE DIA. (IN.)	BLADE PITCH	AMPS	WATTS	# OF FANS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
48"	3	4	N/A	0.1	14	N/A	N/A	N/A	0.09	10	0.27	31	0.36	41
57.5"	3	4	N/A	0.1	14	N/A	N/A	N/A	0.09	10	0.27	31	0.36	41
75.5"	4	4	N/A	0.2	19	N/A	N/A	N/A	0.13	15	0.40	46	0.53	61
96"	6	4	N/A	0.2	28	N/A	N/A	N/A	0.18	21	0.54	62	0.72	82
144"	9	4	N/A	0.4	42	N/A	N/A	N/A	0.27	31	1.08	93	1.35	124

OPTIONAL HIGH OUTPUT LED LIGHTS (115 VOLT)

CASE LENGTH	CANOPY LIGHTS H.O. LED		OPTIONAL SHELF		MAX. H.O. LED LOAD	
	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
48"	0.13	15	0.40	46	0.53	61
57.5"	0.13	15	0.40	46	0.53	61
75.5"	N/A	N/A	N/A	N/A	N/A	N/A
96"	0.26	30	0.79	91	1.06	122
144"	0.26	30	1.59	183	1.85	213

Standard Heaters, Optional outlets

ANTI-SWEAT HEATERS (ON FAN CIRCUIT)		CONVENIENCE OUTLETS (OPTIONAL)		
AMPS	WATTS	# OUTLETS	VOLTS	AMPS
N/A	N/A	1	115	15
N/A	N/A	1	115	15
N/A	N/A	1	115	15
N/A	N/A	1	115	15
N/A	N/A	1	115	15