
CED 1D01

HUSSMANN®

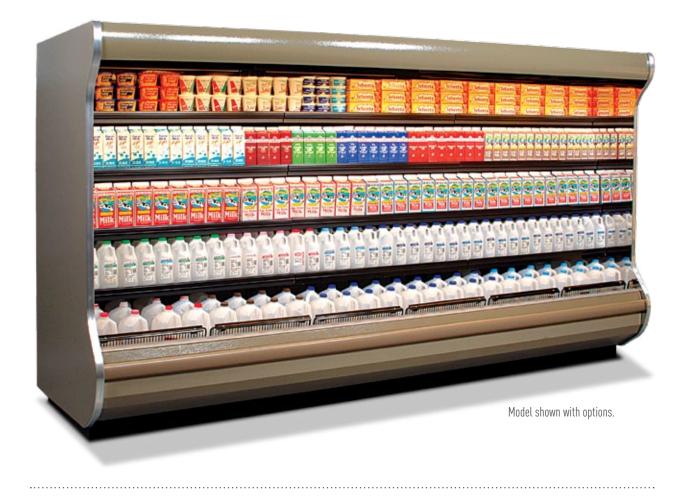

D5X


Excel Multi-Deck Dairy/Deli Display Merchandiser

CED 1D01

Hussmann Excel Multi-Deck Display for Dairy and Deli Applications


D5X-E D5X-LE D5X-HE **D5NX-LE** D5X-EP D5X-LEP D5X-HEP **D5NX-LEP**

Available in 8' and 12' lengths. Contact your sales rep for information on possible availability of additional case lengths.



Plan View -

D5X-E, D5X-LE, D5X-LEP, D5X-HE, D5X-HEP



Overall case length without ends or partitions.

Note

Use Hussmann's technical data sheets to get precise dimensions for all store layout purposes.

4 3/4 (120)

Superior Merchandising.


The D5X family was designed to help you merchandise and sell. Superior display features include full vision glass ends, illuminated canopy signs, improved ledge lighting, greater shelf placement flexibility and more. Streamline and contour styling available.

Lower Energy Costs.


Excel D5X cases come with energy efficient "E" coils as standard on "E" models. The super efficient E-Plus coils on "EP" models reduce energy costs by about 18% compared to standard Impact dairy. Night curtains can be added to help trim about 12.6% more off your energy costs for this case.

E = Energy Efficient Coil **EP =** E Plus, Extra High **Efficiency Coil**

L = Low Front H = High Front **N=Narrow Footprint**

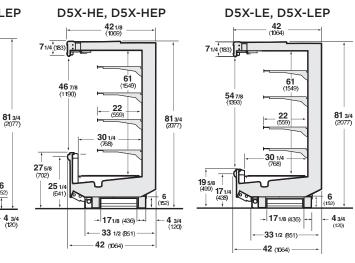

Plan View -D5NX-LE, D5NX-LEP



Notes:

Case-to-case electrical connections are made in front of splashguard. Overall case length without ends or partitions

Superior Shelf Life.

Modular coils and off-time defrost work to reduce thermal shock and stabilize product temperatures. Modular defrost (optional) can further stabilize temperatures.



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2012 energy efficiency standards.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources, contact your representative or visit www.hussmann.com



Hussmann Corporation 12999 St. Charles Rock Rd. Bridgeton, MO 63044-2483 Ph: 314.291.2000

www.hussmann.com