ESZ5-HO-HMB SLINGSHOT™ Face to Face Slicer Mounting System® ★ Saves 54 - 87 hours cleaning time per slicer annually

STANDARD FEATURES:

- 2 Axis Adjustable Type 304 Stainless Steel Slicer Suspension Mounting Beams and High Polish Saddles With Offset Beam That Adjusts to Symmetrical and Asymmetrical Footprints
- Easy to Wipe Concave Downward Type 304 Stainless Steel Pan
- **3** 4 Outboard & 2 "Center Pivot" Retractable Wheels The Front (2) Swivel Casters Are Stainless Steel
- 4 Heavy Gauge Type 304 Stainless Steel **Tubular Frame Construction**

- Heavy Duty Type 304 Stainless Steel Height Adjustable Feet with 7.5^o Angular Misalignment And High Coefficient Friction 3.5" Diameter Slotted Puck
- 6 Heavy Duty Type 304 Stainless Steel Lower Shelf With Splash Guard Kick Plate To Cover Front Wheels
- ⑦ Slide Out Removable Polsan™ Mid Shelf With **Cleaning Bottle Holder**
- 8 Left Handle Grip
- ① Tall Ergo-Style Right Handle
- XZ-CT Type 304 Stainless Steel Closed Coved Corner Slide Out Crumb Tray
- Antimicrobial Rubber Boots That Cover Slicer Feet and Mounting Saddles
- X50 Removable/Height Adjustable S/S Scale Shelf with Vibration Isolation




Keep Your Customers Close

- 13 X50SMBH (2 Axis) Front or Side Scale Shelf Mounted Deli Bag Holder (Removable)
- Removable Polsan[™] **Cutting Board with Drain** Channels
- **(B)** X-8 Slim Width Knife Rack
- X-DR-ESZ5 Debris Receptacle Accessorv
- **17** XZ-22 Combination Width Adjustable Poly Bag and Tissue / Glove Box Holder With (4) Position Height Adjustable Reversible (3) Axis Pole

NOTE: This model includes special beams for use with Hobart Slicer Model 1712 and 1912 which have an exposed operating mechanism underneath. Consult our factory if another model of slicer is to be used which has an exposed operating mechanism underneath.

visit --> www.facetofaceequipment.com

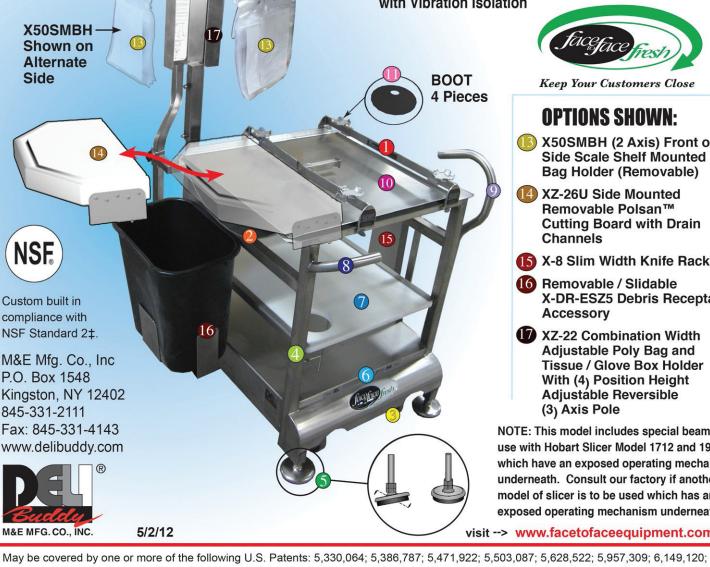

6,322,180; 6,366,313; 6,474,757; 6,974,042; 7,419,063; D480,528; D481,513. Other U.S. & foreign patents pending.